

Connectable Units

Collator : VAC-100 / VAC-60H


Stitcher : SPF-20 / SPF-20A / StitchLiner5500

Receiving Tray : CCR-DX / CCR

One-touch switching between the bookletmaker and receiving tray.

Features

- Connectable with the collators (VAC-100 / VAC-60H), stitchers (SPF-20 / SPF-20A / StitchLiner5500), and receiving trays (CCR-DX / CCR) all together.
- Switching over from bookletmaking to stacking with simple push of a button.
- The built-in rejecting tray is equipped for non-stop collation.
- Sheet jam detection is provided. And the LED shows the location of jam.
- The BC-20 is equipped with hand feeding function as standard.

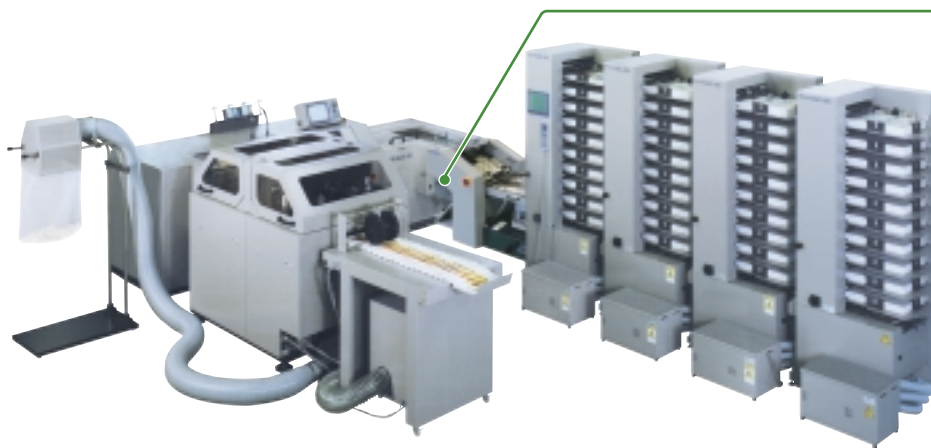

StitchLiner5500



- * - When BC-20 is installed with CCR-DX / CCR, the connector box (BC-20CB) is required.
- When BC-20 is installed without CCR-DX / CCR, the docking plate (BC-20CP) is required.

BC-20 Specifications

Available Collators	VAC-100 / VAC-60H	Voltage / Frequency	Single Phase 200 V, 50 / 60 Hz 220 V, 60 Hz 230 V, 50 Hz 240 V, 50 / 60 Hz
Available Receiving Trays	CCR-DX / CCR	Rated Current	Single Phase 200 V, 50 / 60 Hz, 1.9 A (Max. 2.1 A) Single Phase 220 V, 60 Hz, 1.9 A (Max. 2.0 A) Single Phase 230 V, 50 Hz, 1.9 A (Max. 2.0 A) Single Phase 240 V, 50 / 60 Hz, 1.8 A (Max. 1.9 A)
Available Stitchers	SPF-20 / SPF-20A / StitchLiner5500	Power Consumption	Single Phase 200 V, 50 / 60 Hz, 180 W Single Phase 220 V, 60 Hz, 190 W Single Phase 230 V, 50 Hz, 190 W Single Phase 240 V, 50 / 60 Hz, 200 W
Max. Sheet Size	350(W) x 500(L) mm (13.77" x 19.68")	Heat Output	320 kJ (80 kcal)
Min. Sheet Size	120(W) x 148(L) mm (4.73" x 5.83")		
Sheet Weight Range	52 to 208 gsm		
Reject Tray Capacity	Max. 30 mm (1.1")		
Machine Weight	98 kg (216 lbs.)		
Machine Dimensions	1,255(W) x 686(D) x 910(H) mm (49.5" x 27.1" x 35.9")		

*The machine design and specifications are subject to change without any notice.

Distributed by



HORIZON INTERNATIONAL, INC.

510 Kuze Ooyabu-cho, Minami-ku, Kyoto, 601-8206, Japan Phone : +81-(0)75-934-6700, Fax : +81-(0)75-934-6708, www.horizon.co.jp