

**Horizon**

# CRB-160

Creaser

**A cover creaser that communicates with BQ-160 binder !**



BQ-160

CRB-160

## Features

---

1. Impact scoring position is set automatically according to the book thickness inserted into the BQ-160.
2. Clean and sharp impact creases can be made even with heavier and laminated stock.
3. Stand alone model is also available with an integrated touch screen operation console.
4. A wide variety of impact scoring patterns can be selected from the touch screen.
5. Suitable for crease covers, restaurant menus, greeting cards and all digital print applications.

# Eliminate the problem of image cracking of heavier covers and digital printed sheets.


## Operation console

The CRB Creasers can be set-up through the BQ-160 color touch screen. Cover creasing and a variety of other creasing patterns can be selected from the touch screen.



## Delivery tray

Creased sheets are delivered at a comfortable height for easy handling.

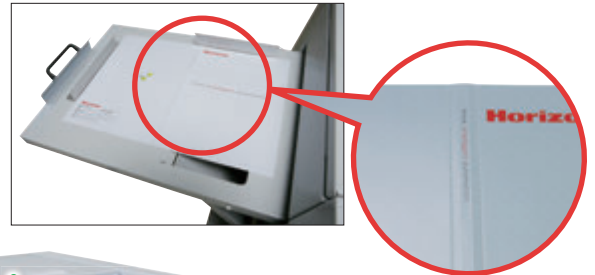

## Impact creasing section

Impact creasing position is automatically set according to the book thickness inserted into the BQ-160.

Depth of the creasing can also be set depending on cover thickness.



CRB-160


## CRS-36 (Stand alone model)

A stand alone model is available with built in touch screen. Suitable for impact creasing restaurant menus, greeting cards and various types of heavier stock.



CRS-36

## CRB-160 / CRS-36 Major Specifications

Installation Type	Floor Model	
Sheet Feeding System	Manual Feed	
Sheet Size		<b>Width x Length</b> Max. 364 x 650 mm / 14.33" x 25.59" Min. 140 x 180 mm / 5.52" x 7.09" A3 / A4 / A5 / B4 / B5 8.5x11" / 8.5x14" / 11x17" / 12x18"
Sheet Weight Range	Normal Paper, Coated Paper 81.4 to 407 gsm / 24 lb bond to 150 lb cover	
Creasing Mechanism	One set of positive and negative	
Number of Creasing Lines	Max. Eight Creasing Lines	
Production Speed	Length 430 mm / 16.92", Four Creasing Lines, 4 sec / sheet	
Voltage/Frequency	Single Phase 100 V, 115 V, 230 V, 50 / 60 Hz	
Machine Dimensions	CRB-160: W1,326 x D610 x H980 mm / W52.3" x D24.1" x H38.6" When the delivery tray is folded W752 x D610 x H980 mm / W29.7" x D24.1" x H38.6" CRS-36: W1,326 x D630 x H1,272 mm / W52.3" x D24.9" x H50.1" When the delivery tray is folded W752 x D630 x H1,272 mm / W29.7" x D24.9" x H50.1"	
Machine Weight	CRB-160: 82 kg / 180.8 lb, CRS-160: 85 kg / 187.4 lb	

\*The machine design and specifications are subject to change without any notice.

Distributed by

**HORIZON INTERNATIONAL, INC.**

510 Kuze Ooyabu-cho, Minami-ku, Kyoto, 601-8206, Japan Phone : +81-(0)75-934-6700, Fax : +81-(0)75-934-6708, www.horizon.co.jp