

Horizon

CUTTING

PC-P430



TABLE-TOP PAPER CUTTER FOR OFFICE EFFICIENCY AND COST SAVINGS.



BENEFITS

- Maximum cut width is 434 mm or 17", maximum thickness is up to 23 mm or 0.9".
- Minimum cut length is 50 mm or 1.97" for small format applications such as business cards.
- Sheets are trimmed by simply setting the sheets and pressing the dual push buttons. An automatic clamping press for easy operation.
- Illuminated cut line conveniently identifies the cut position for easy, accurate cutting.
- Innovative cutting knife design for easy and safe knife replacement.

THE PERFECT OFFICE CUTTER FOR CUTTING.

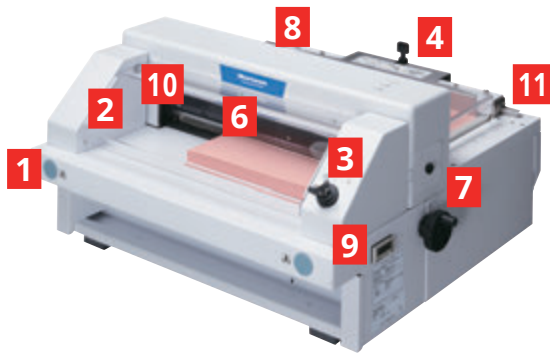

1 DUAL PUSH BUTTONS

The PC-P430 is activated only when the safety cover is closed and both cutting buttons are simultaneously pressed. The two buttons are sufficiently spaced to ensure operator safety.



2 SAFETY FULL COVER

The front cover will not open during the operation. The full cover keeps your fingers away from the moving part.

3 SAFETY POWER KEY

The power switch can be key activated to limit user access.

4 PUSH-OUT LEVER

The operator simply pushes a lever to move cut sheets forward for easy removal.

5 CUT STICK LIFT LEVER

The cut stick is easily replaced by using the integrated lift lever.



6 CUTTING LINE

Illuminated cut line conveniently identifies the cut position for easy sheet positioning.



7 BACKGAUGE HANDLE

Backgauge position can be adjusted by turning the handle.

8 BACKGAUGE FREE MECHANISM

Sheets longer than 320 mm or 12.5" can be trimmed using the backgauge free mechanism.

9 CUTTING KNIFE COUNTER

Cut cycles are indicated on a digital counter to help determine when the cutting knife should be replaced.

10 PRESS SECTION

The sheets are pressed and cut automatically by pressing the cutting buttons. A special cutout is provided to prevent book spines from crushing.

11 DOUBLE LEAD SCREW SYSTEM

Accurate backgauge raceway keeps the gauge square to ensure accurate cutting.



OPTIONS.


MT-P43 PEDESTAL WITH WHEEL

- The MT-P43 includes convenient extra storage space.



FEED ROLLER

- Spare Knife with Sheath 2 pcs
- Cut Stick 10 pcs



*The machine design and specifications are subject to change without any notice.
*Specifications may vary depending on the job, paper quality, environmental influences, and various other factors. Please do a test run before starting production.

SPECIFICATIONS.

PC-P430		
Cutting Width		Max. 434 mm or 17.08"
Cutting Height		Max. 23 mm or 0.9"
Cutting Depth		Max. 320 mm or 12.59" Min. 50 mm or 1.97"
Clamp System	Spring-Operated	
Push-out Length	Min. 50 mm or 1.97"	
Cutting Speed	About 4 seconds per cycle (100 V, 60 Hz) About 4.8 seconds per cycle (100 V, 50 Hz)	
Voltage / Frequency	Single Phase 110 to 120 V, 60 Hz Single Phase 220 to 240 V, 50 or 60 Hz	
Rated Current	Single Phase 110 to 120 V, 60 Hz, 3.9 A Single Phase 220 to 240 V, 50 Hz, 1.6 A	
Machine Dimensions	W675 × D600 × H375 mm or W26.6" × D23.7" × H14.8"	
Machine Weight	66 kg or 145.4 lb	

Horizon

Horizon International Inc.

1601 Asahi, Shinasahicho, Takashima,
Shiga, 520-1501, Japan
Phone : +81-740-25-4570
Fax : +81-740-25-5820
www.horizon.co.jp

Horizon GmbH

Pascalstrasse 20
25451 Quickborn / Germany
Phone : +49 4106 8042-0
Fax : +49 4106 8042-199
www.horizon.de

MORE AT
HORIZON.CO.JP

